

Data sheet 5SYA 1490-01 Jan 22

# 5SNG 0600R120590

LoPak phase leg IGBT module

- $V_{CE} = 1200\text{ V}$
- $I_C = 2 \times 600\text{ A}$
- Press-fit pins for reliable auxiliary contacts
- Ultra low-loss rugged Trench IGBT chipset
- NTC thermistor for temperature sensing
- Cu baseplate for low thermal resistance
- Pre-Applied Thermal Interface Material (TIM) to improve thermal conductivity between module and heat sink
- Industry standard package



## Maximum rated values <sup>1)</sup>

Parameter	Symbol	Conditions	Min.	Max.	Unit
Collector-emitter voltage	$V_{CES}$	$V_{GE} = 0\text{ V}$ , $T_{vj} \geq 25\text{ °C}$		1200	V
DC collector current	$I_C$	$T_C = 105\text{ °C}$ , $T_{vj} = 175\text{ °C}$		600	A
Peak collector current	$I_{CM}$	$t_p = 1\text{ ms}$		1200	A
Gate-emitter voltage	$V_{GES}$		-20	20	V
DC forward current	$I_F$			600	A
Peak forward current	$I_{FRM}$	$t_p = 1\text{ ms}$		1200	A
Surge current	$I_{FSM}$	$T_{vj\text{ start}} = 175\text{ °C}$ , $t_p = 10\text{ ms}$ , half-sinewave		2000	A
IGBT short circuit SOA	$t_{psc}$	$V_{GE} \leq 15\text{ V}$ , $V_{CC} = 900\text{ V}$ $V_{CE,max} \leq 1200\text{ V}$	$T_{vj\text{ start}} \leq 150\text{ °C}$	8	$\mu\text{s}$
			$T_{vj\text{ start}} \leq 175\text{ °C}$	6	
Isolation voltage	$V_{isol}$	1 min, $f = 50\text{ Hz}$		4000	V
Max Junction temperature	$T_{vj}$		-40	175	$^{\circ}\text{C}$
Junction operating temperature	$T_{vj(op)}$		-40	175	$^{\circ}\text{C}$
Case temperature	$T_C$		-40	125 <sup>2)</sup> / 150	$^{\circ}\text{C}$
Storage temperature	$T_{stg}$		-40	125	$^{\circ}\text{C}$
Mounting torques <sup>3)</sup>	$M_s$	Base-heatsink, M5 screws	3	6	Nm
	$M_{t1}$	Main terminals, M6 screws	3	6	

<sup>1)</sup> Maximum rated values indicate limits beyond which damage to the device may occur per IEC 60747

<sup>2)</sup> For UL1557 compliance  $T_{Cmax}$  must be limited to 125 $^{\circ}\text{C}$

<sup>3)</sup> For detailed mounting instructions refer to application note 5SYA 2142

**IGBT characteristic values <sup>4)</sup>**

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Collector-emitter breakdown voltage	$V_{(BR)CES}$	$V_{GE} = 0\text{ V}$ , $I_C = 5\text{ mA}$	$T_{vj} = 25\text{ °C}$	1200		V
Collector-emitter <sup>5)</sup> saturation voltage	$V_{CEsat}$	$I_C = 600\text{ A}$ , $V_{GE} = 15\text{ V}$	$T_{vj} = 25\text{ °C}$	1.53		V
			$T_{vj} = 125\text{ °C}$	1.71		V
			$T_{vj} = 175\text{ °C}$	1.83		V
Collector cut-off current	$I_{CES}$	$V_{CE} = 1200\text{ V}$ , $V_{GE} = 0\text{ V}$	$T_{vj} = 25\text{ °C}$		0.1	mA
			$T_{vj} = 125\text{ °C}$	0.35		mA
			$T_{vj} = 175\text{ °C}$	12		mA
Gate leakage current	$I_{GES}$	$V_{CE} = 0\text{ V}$ , $V_{GE} = \pm 20\text{ V}$	$T_{vj} = 125\text{ °C}$	-150	150	nA
Gate-emitter threshold voltage	$V_{GE(th)}$	$I_C = 24\text{ mA}$ , $V_{CE} = V_{GE}$	$T_{vj} = 25\text{ °C}$	5.5		V
Gate charge	$Q_G$	$I_C = 600\text{ A}$ , $V_{CE} = 600\text{ V}$ , $V_{GE} = -15\text{ V} \dots 15\text{ V}$		4.1		$\mu\text{C}$
Input capacitance	$C_{ies}$	per switch	$T_{vj} = 25\text{ °C}$	76		nF
Internal gate resistance	$R_{g,int}$	per switch		2		$\Omega$
Turn-on delay time	$t_{d(on)}$	$V_{CC} = 600\text{ V}$ , $I_C = 600\text{ A}$ , $R_G = 0.51\ \Omega$ , $C_{GE} = 0\text{ nF}$ , $V_{GE} = \pm 15\text{ V}$ , $L_\sigma = 30\text{ nH}$ , inductive load	$T_{vj} = 25\text{ °C}$	435		ns
			$T_{vj} = 125\text{ °C}$	488		ns
			$T_{vj} = 175\text{ °C}$	510		ns
Rise time	$t_r$	$V_{CC} = 600\text{ V}$ , $I_C = 600\text{ A}$ , $R_G = 0.51\ \Omega$ , $C_{GE} = 0\text{ nF}$ , $V_{GE} = \pm 15\text{ V}$ , $L_\sigma = 30\text{ nH}$ , inductive load	$T_{vj} = 25\text{ °C}$	156		ns
			$T_{vj} = 125\text{ °C}$	202		ns
			$T_{vj} = 175\text{ °C}$	225		ns
Turn-off delay time	$t_{d(off)}$	$V_{CC} = 600\text{ V}$ , $I_C = 600\text{ A}$ , $R_G = 0.51\ \Omega$ , $C_{GE} = 0\text{ nF}$ , $V_{GE} = \pm 15\text{ V}$ , $L_\sigma = 30\text{ nH}$ , inductive load	$T_{vj} = 25\text{ °C}$	385		ns
			$T_{vj} = 125\text{ °C}$	417		ns
			$T_{vj} = 175\text{ °C}$	427		ns
Fall time	$t_f$	$V_{CC} = 600\text{ V}$ , $I_C = 600\text{ A}$ , $R_G = 0.51\ \Omega$ , $C_{GE} = 0\text{ nF}$ , $V_{GE} = \pm 15\text{ V}$ , $L_\sigma = 30\text{ nH}$ , inductive load	$T_{vj} = 25\text{ °C}$	112		ns
			$T_{vj} = 125\text{ °C}$	148		ns
			$T_{vj} = 175\text{ °C}$	176		ns
Turn-on switching energy	$E_{on}$	$V_{CC} = 600\text{ V}$ , $I_C = 600\text{ A}$ , $R_G = 0.51\ \Omega$ , $C_{GE} = 0\text{ nF}$ , $V_{GE} = \pm 15\text{ V}$ , $L_\sigma = 30\text{ nH}$ , inductive load	$T_{vj} = 25\text{ °C}$	95		mJ
			$T_{vj} = 125\text{ °C}$	140		mJ
			$T_{vj} = 175\text{ °C}$	171		mJ
Turn-off switching energy	$E_{off}$	$V_{CC} = 600\text{ V}$ , $I_C = 600\text{ A}$ , $R_G = 0.51\ \Omega$ , $C_{GE} = 0\text{ nF}$ , $V_{GE} = \pm 15\text{ V}$ , $L_\sigma = 30\text{ nH}$ , inductive load	$T_{vj} = 25\text{ °C}$	67		mJ
			$T_{vj} = 125\text{ °C}$	99		mJ
			$T_{vj} = 175\text{ °C}$	115		mJ
Short circuit current	$I_{SC}$	$V_{CC} = 900\text{ V}$ , $V_{GE} = 15\text{ V}$ , $V_{CEM\ CHIP} \leq 1200\text{ V}$	$T_{vj} = 175\text{ °C}$	2500		A

<sup>4)</sup> Characteristic values according to IEC 60747 – 9

<sup>5)</sup> Collector-emitter saturation voltage is given at chip level

Hitachi Energy Switzerland Ltd  
Semiconductors  
Fabrikstrasse 3  
5600 Lenzburg  
Switzerland  
Tel: +41 58 586 10 00

E-Mail: salesdesksem@hitachienergy.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail.

Hitachi Energy Ltd. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of Hitachi Energy Ltd.

#### Diode characteristic values <sup>6)</sup>

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward voltage <sup>7)</sup>	V <sub>F</sub>	I <sub>F</sub> = 600 A	T <sub>vj</sub> = 25 °C	1.67		V
			T <sub>vj</sub> = 125 °C	1.71		V
			T <sub>vj</sub> = 175 °C	1.65		V
Peak reverse recovery current	I <sub>rm</sub>		T <sub>vj</sub> = 25 °C	368		A
			T <sub>vj</sub> = 125 °C	377		A
			T <sub>vj</sub> = 175 °C	400		A
Recovered charge	Q <sub>rr</sub>	V <sub>CC</sub> = 600 V, I <sub>F</sub> = 600 A, V <sub>GE</sub> = ±15 V, R <sub>G</sub> = 0.51 Ω, C <sub>GE</sub> = 0 nF, L <sub>σ</sub> = 30 nH, di/dt = 2.9 kA / μs, inductive load	T <sub>vj</sub> = 25 °C	77		μC
			T <sub>vj</sub> = 125 °C	105		μC
			T <sub>vj</sub> = 175 °C	141		μC
Reverse recovery time	t <sub>rr</sub>		T <sub>vj</sub> = 25 °C	294		ns
			T <sub>vj</sub> = 125 °C	498		ns
			T <sub>vj</sub> = 175 °C	696		ns
Reverse recovery energy	E <sub>rec</sub>		T <sub>vj</sub> = 25 °C	18		mJ
			T <sub>vj</sub> = 125 °C	26		mJ
			T <sub>vj</sub> = 175 °C	34		mJ

<sup>6)</sup> Characteristic values according to IEC 60747 – 2

<sup>7)</sup> Forward voltage is given at chip level

#### NTC Thermistor

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Rated resistance	R <sub>25</sub>	T <sub>c</sub> = 25 °C		5		kΩ
R100	R <sub>100</sub>	T <sub>c</sub> = 100 °C	468		517	Ω
B-value	B <sub>25/85</sub>	R <sub>25</sub> = R <sub>25</sub> exp [B <sub>25/85</sub> (1/T <sub>2</sub> – 1/(298.15K))]		3375		K
B-value	B <sub>25/100</sub>	R <sub>25</sub> = R <sub>25</sub> exp [B <sub>25/100</sub> (1/T <sub>2</sub> – 1/(298.15K))]		3433		K

Hitachi Energy Switzerland Ltd  
Semiconductors  
Fabrikstrasse 3  
5600 Lenzburg  
Switzerland  
Tel: +41 58 586 10 00

E-Mail: salesdesksem@hitachienergy.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail.

Hitachi Energy Ltd. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of Hitachi Energy Ltd.

### Package properties

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
IGBT thermal resistance junction to case	$R_{th(j-c) IGBT}$	per switch			0.0645	K/W
Diode thermal resistance junction to case	$R_{th(j-c) DIODE}$	per switch			0.1425	K/W
IGBT thermal resistance case to heatsink <sup>8)</sup>	$R_{th(c-s) IGBT}$	IGBT per switch, TIM = 5 W/m x K		0.026		K/W
Diode thermal resistance case to heatsink <sup>8)</sup>	$R_{th(c-s) DIODE}$	Diode per switch, TIM = 5 W/m x K		0.032		K/W
Comparative tracking index	CTI		200			
Module stray inductance	$L_{\sigma CE}$	per switch		20		nH
Resistance, terminal-chip	$R_{CC-EE}$	per switch	$T_C = 25\text{ °C}$	0.95		mΩ
			$T_C = 125\text{ °C}$	1.35		
			$T_C = 175\text{ °C}$	1.55		

<sup>8)</sup> Depends on heatsink design

### Mechanical properties <sup>9)</sup>

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Dimensions	L x W x H	Typical		152 x 62 x 17		mm
Clearance distance in air	$d_a$	According to IEC 60664-1 and EN 50124-1	Term. to base:	12.5		mm
			Term. to base:	10		
Surface creepage distance	$d_s$	According to IEC 60664-1 and EN 50124-1	Term. to base:	14.5		mm
			Term. to base:	13		
Mass	m			350		g

<sup>9)</sup> Package and mechanical properties according to IEC 60747 – 15

Hitachi Energy Switzerland Ltd  
Semiconductors  
Fabrikstrasse 3  
5600 Lenzburg  
Switzerland  
Tel: +41 58 586 10 00


E-Mail: salesdesksem@hitachienergy.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail.


Hitachi Energy Ltd. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of Hitachi Energy Ltd.


**Electrical configuration**

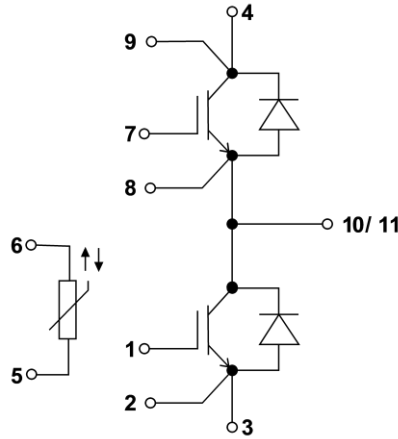

**Mechanical drawing**

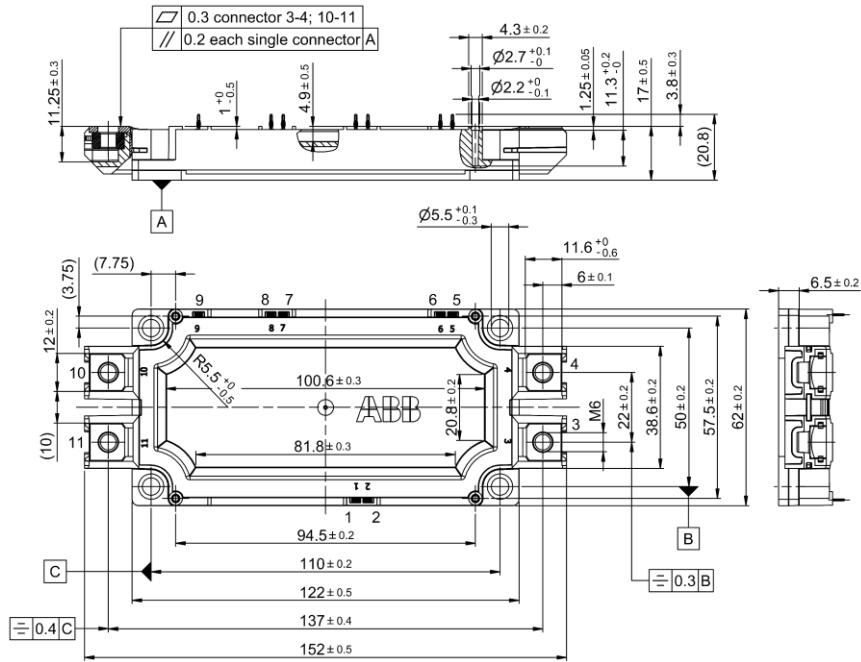

**PCB drill hole pattern for press-fit**

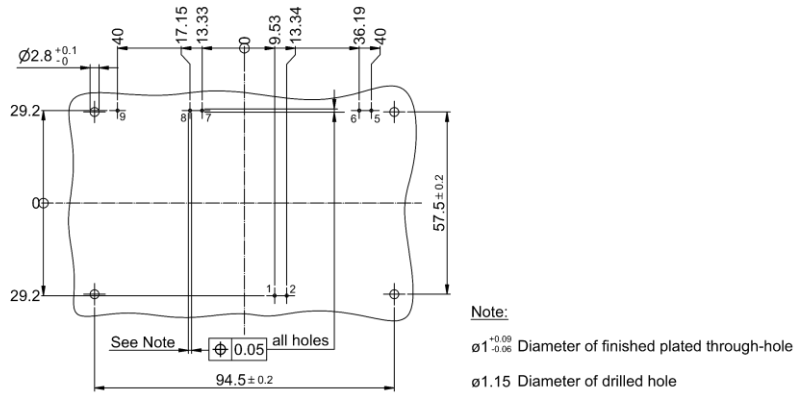

**Note: all dimensions are shown in millimeters**

Hitachi Energy Switzerland Ltd  
Semiconductors  
Fabrikstrasse 3  
5600 Lenzburg  
Switzerland  
Tel: +41 58 586 10 00

E-Mail: salesdesksem@hitachienergy.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail.

Hitachi Energy Ltd. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of Hitachi Energy Ltd.

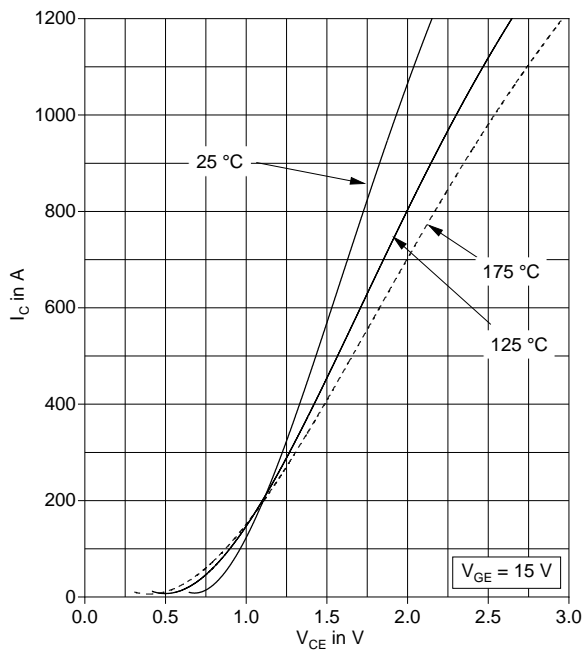


Fig. 1 Typical on-state characteristics, chip level

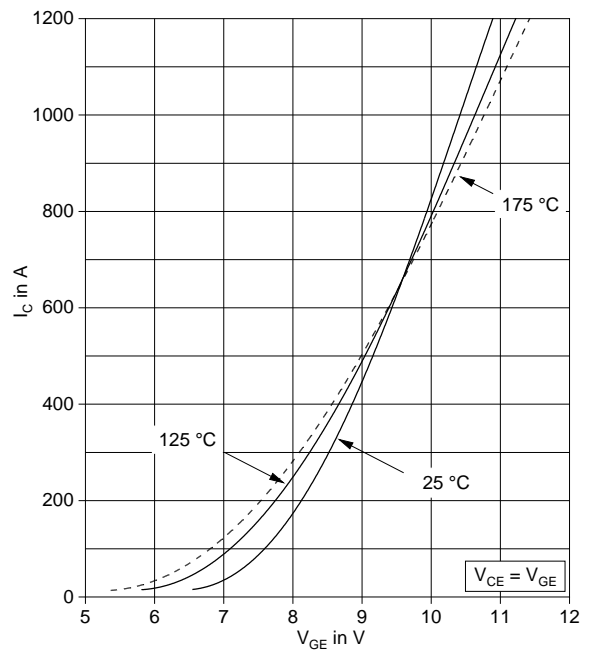


Fig. 2 Typical transfer characteristics, chip level

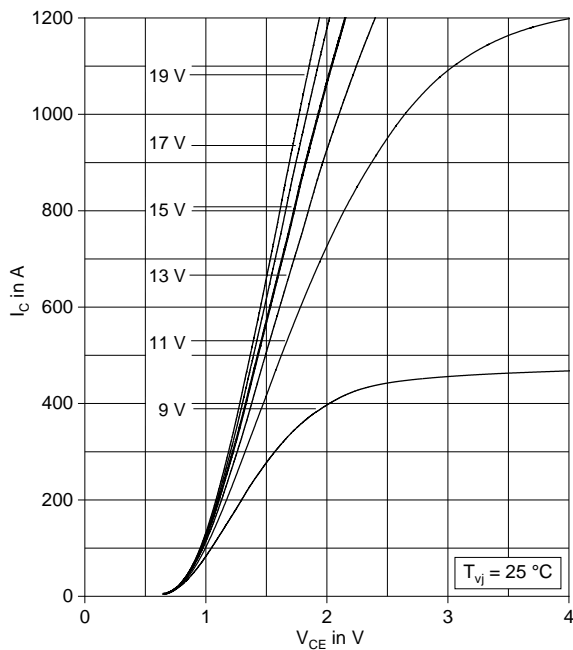


Fig. 3 Typical output characteristics, chip level

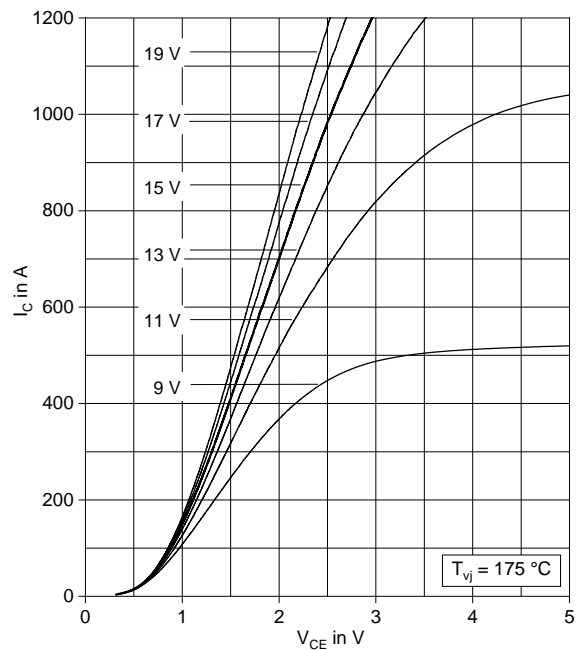


Fig. 4 Typical output characteristics, chip level

Hitachi Energy Switzerland Ltd  
Semiconductors  
Fabrikstrasse 3  
5600 Lenzburg  
Switzerland  
Tel: +41 58 586 10 00

E-Mail: salesdesksem@hitachienergy.com

[www.hitachienergy.com/semiconductors](http://www.hitachienergy.com/semiconductors)

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail.

Hitachi Energy Ltd. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of Hitachi Energy Ltd.

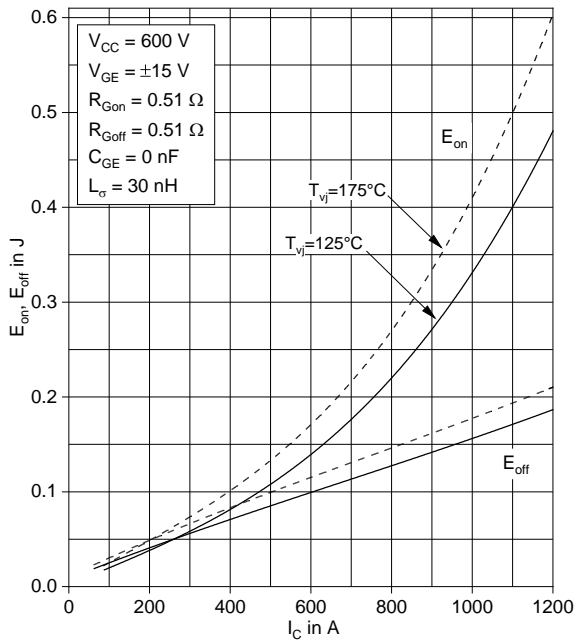


Fig. 5 Typical switching energies per pulse vs. collector current

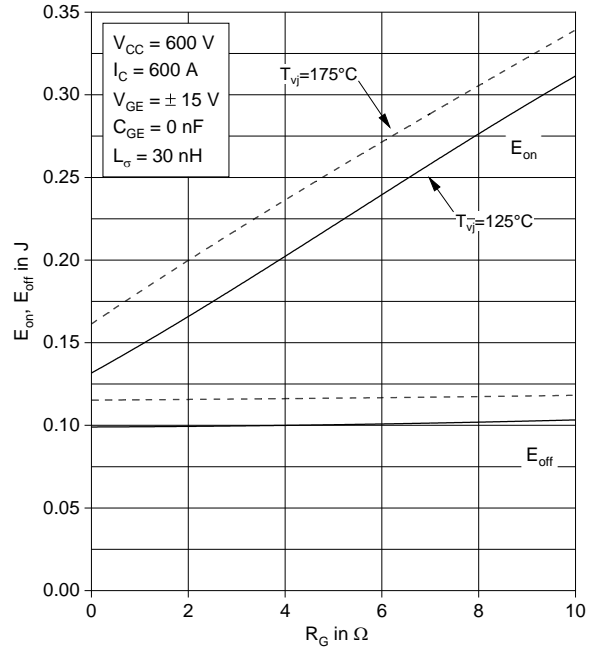


Fig. 6 Typical switching energies per pulse vs. gate resistor

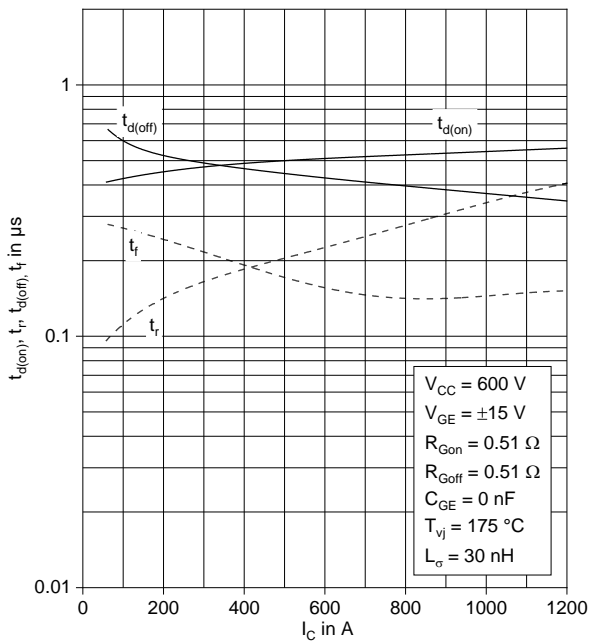


Fig. 7 Typical switching times vs. collector current

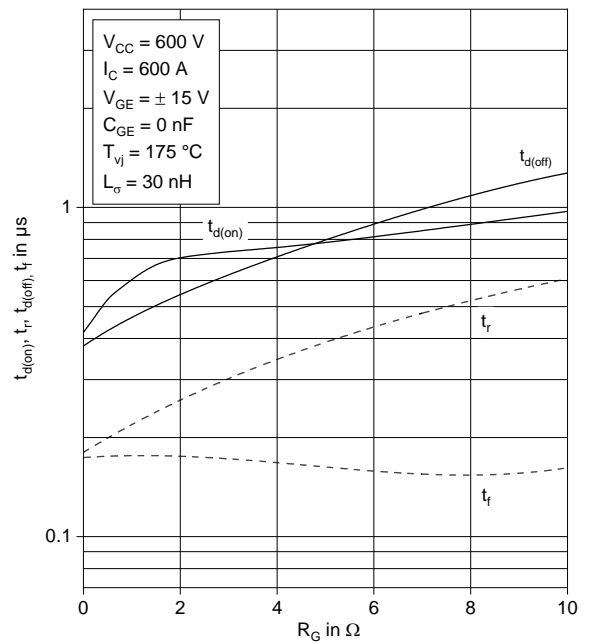


Fig. 8 Typical switching times vs. gate resistor

Hitachi Energy Switzerland Ltd  
Semiconductors  
Fabrikstrasse 3  
5600 Lenzburg  
Switzerland  
Tel: +41 58 586 10 00

E-Mail: salesdesksem@hitachienergy.com

[www.hitachienergy.com/semiconductors](http://www.hitachienergy.com/semiconductors)

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail.

Hitachi Energy Ltd. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of Hitachi Energy Ltd.

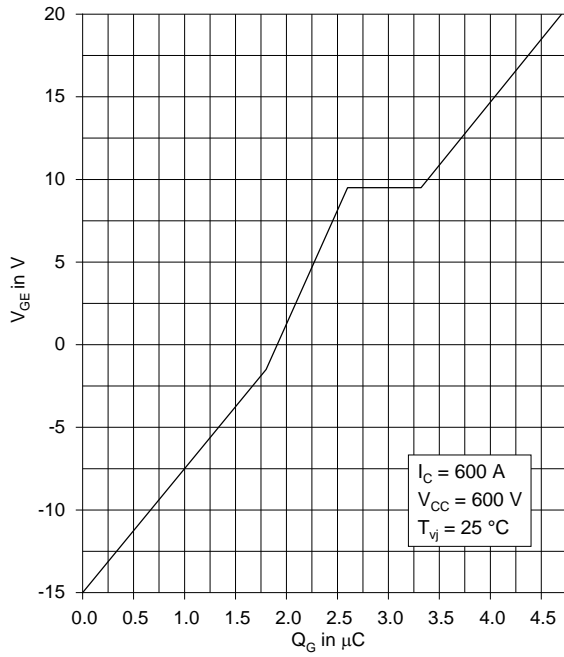


Fig. 9 Typical gate charge characteristics

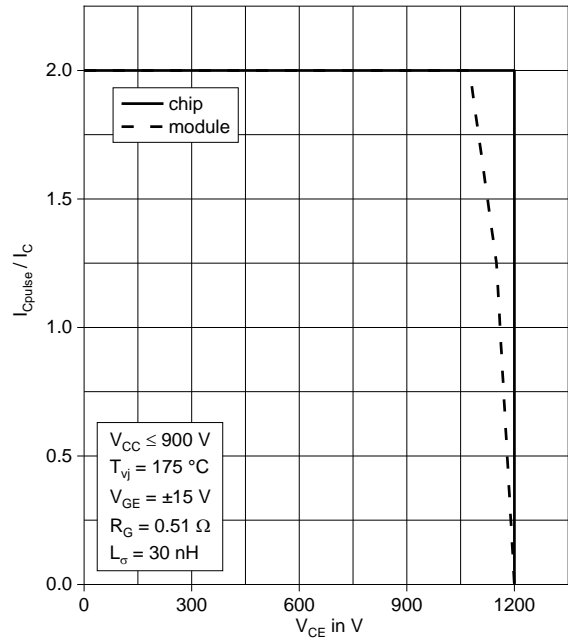


Fig. 10 Turn-off safe operating area (RBSOA)

**Hitachi Energy Switzerland Ltd**  
 Semiconductors  
 Fabrikstrasse 3  
 5600 Lenzburg  
 Switzerland  
 Tel: +41 58 586 10 00

E-Mail: [salesdesksem@hitachienergy.com](mailto:salesdesksem@hitachienergy.com)

[www.hitachienergy.com/semiconductors](http://www.hitachienergy.com/semiconductors)

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail.

Hitachi Energy Ltd. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of Hitachi Energy Ltd.



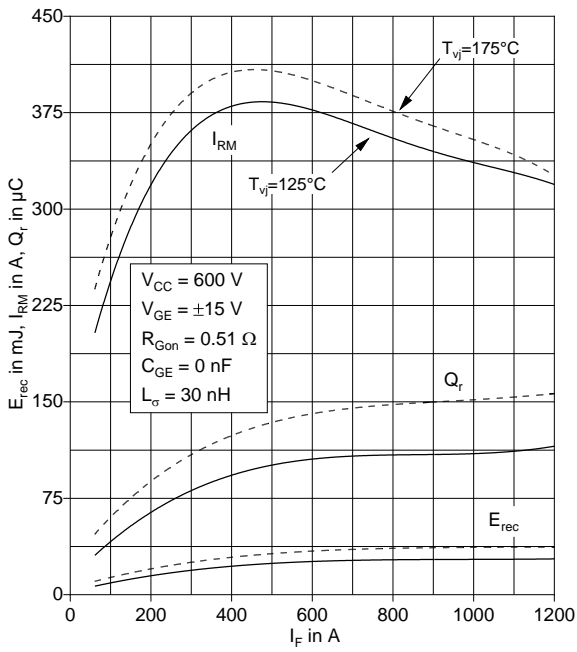


Fig. 11 Typical reverse recovery characteristics vs. forward current

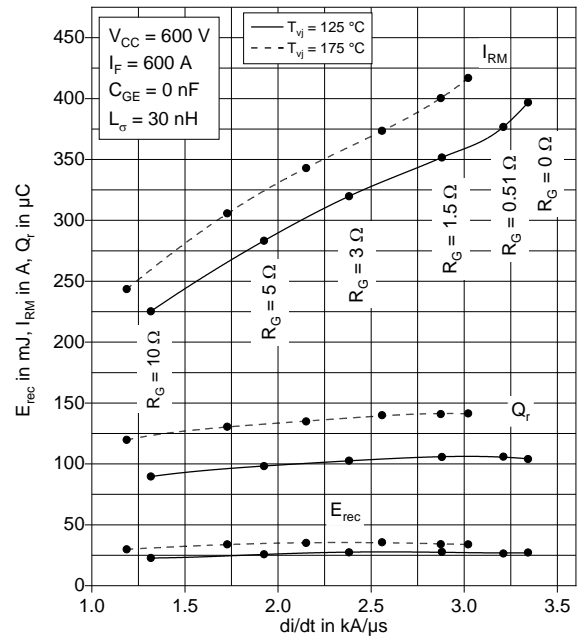


Fig. 12 Typical reverse recovery characteristics vs. di/dt

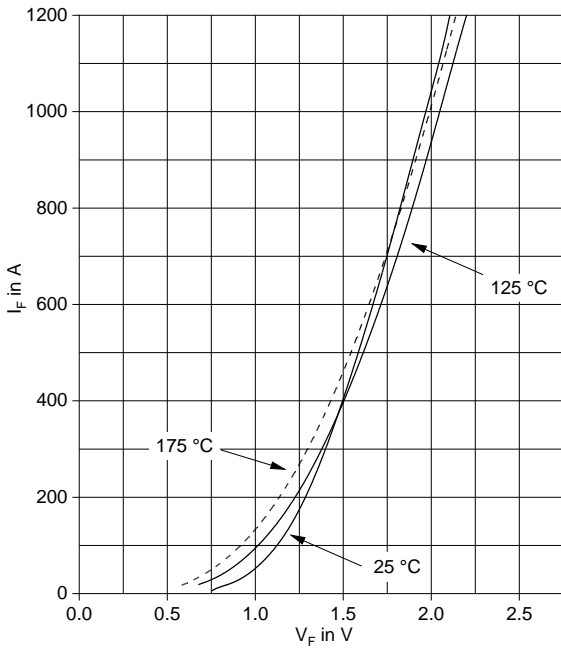


Fig. 13 Typical diode forward characteristics, chip level

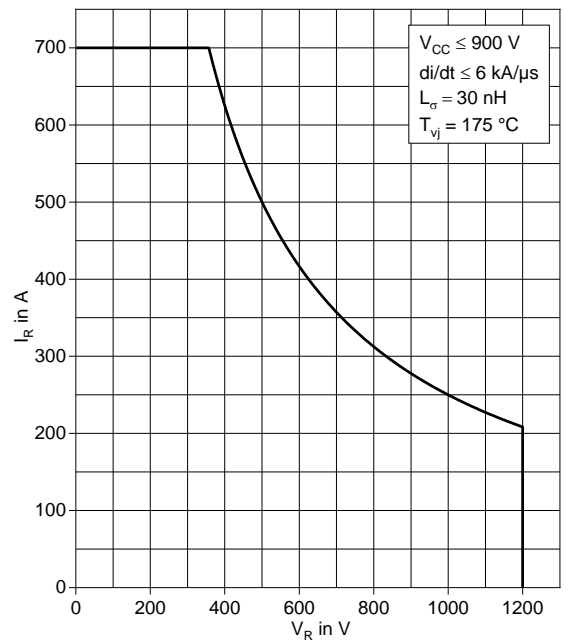


Fig. 14 Diode turn-off safe operating area (DSOA)

Hitachi Energy Switzerland Ltd  
Semiconductors  
Fabrikstrasse 3  
5600 Lenzburg  
Switzerland  
Tel: +41 58 586 10 00

E-Mail: salesdesksem@hitachienergy.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail.

Hitachi Energy Ltd. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of Hitachi Energy Ltd.

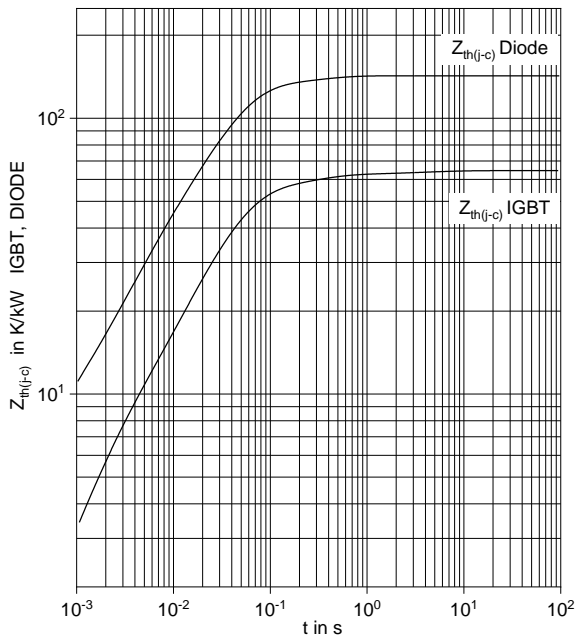


Fig. 16 Thermal impedance vs time

Analytical function for transient thermal impedance:

$$Z_{th(j-c)}(t) = \sum_{i=1}^n R_i (1 - e^{-t/\tau_i})$$

IGBT	i	1	2	3	4	5
	R <sub>i</sub> (K/kW)	4.58	9.97	47.7	2.3	
	τ <sub>i</sub> (ms)	1.92	229.4	35.1	3922	
DIODE	i	1	2	3	4	5
	R <sub>i</sub> (K/kW)	5.29	14.9	108	14.3	
	τ <sub>i</sub> (ms)	0.36	263.8	35.5	4.4	

### Related documents:

5SYA 2042 Failure rates of IGBT modules due to cosmic rays  
 5SYA 2045 Thermal runaway during blocking  
 5SYA 2053 Applying IGBT  
 5SYA 2057 IGBT diode safe operating area (SOA)

5SYA 2058 Surge currents for IGBT diodes  
 5SYA 2093 Thermal design of IGBT modules  
 5SYA 2098 Paralleling of IGBT modules  
 5SYA 2142 LoPak modules use and installation

Hitachi Energy Switzerland Ltd  
 Semiconductors  
 Fabrikstrasse 3  
 5600 Lenzburg  
 Switzerland  
 Tel: +41 58 586 10 00

E-Mail: salesdesksem@hitachienergy.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail.

Hitachi Energy Ltd. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of Hitachi Energy Ltd.