



斯托姆科技

# Full Metal AXIL


TUV  
CERT  
ISO 9001:2000  
ISO 14001:2004  
ISO/TS16949:2002



## STORM AC Full Metal AXIL FAN 280X280X80Series



### Dimensions (mm)

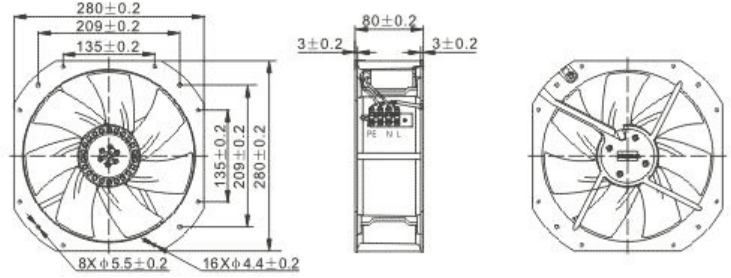


### CONSTRUCTION:

- Die-cast cast aluminum housing
- Metal impeller or
- Glass fiber reinforced plastic:
- Impeller are UL 94V-0 rating
- Shaded pole motor/Impedance protected
- Leader wire or terminal is available

### OPERATING TEMPERATURE:

- Ball bearing -30°C to +75°C
- Sleeve bearing -10°C to +70°C

### Performance Curve

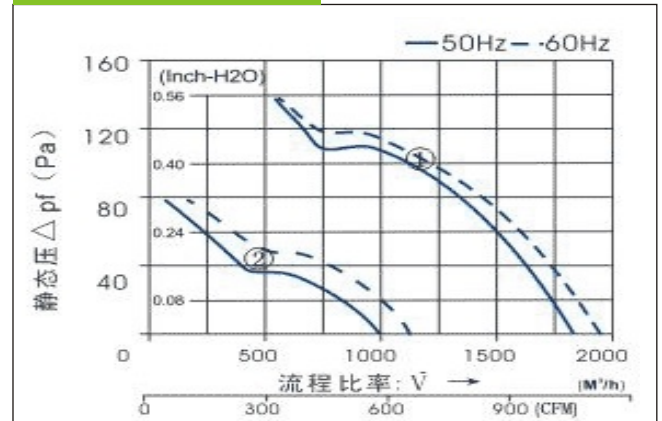

Model	Spec	RATED (VDC)	FREQ. (Hz)	CURRT (Amp)	POWER (Watts)	SPEED (Rpm)	AIR FLOW (CFM)	PRESSURE (In H <sub>2</sub> O)	NOISE (dB-A)	Weight (g)	Curve
SA28080HB-11F		100/120	50/60	0.97/1.36	110/155	2480/2600	1060/1150	5.51/5.72	68/70	2200	①
SA28080MB-22F		200/240	50/60	0.19/0.20	42/45	1380/1560	690/700	2.95/3.34	45/48	2200	②
SA28080HB-22F		200/240	50/60	0.51/0.70	115/160	2500/2700	1060/1150	5.51/5.72	68/70	2200	①