


超低温变频采暖热泵机组

Air-cooled chiller

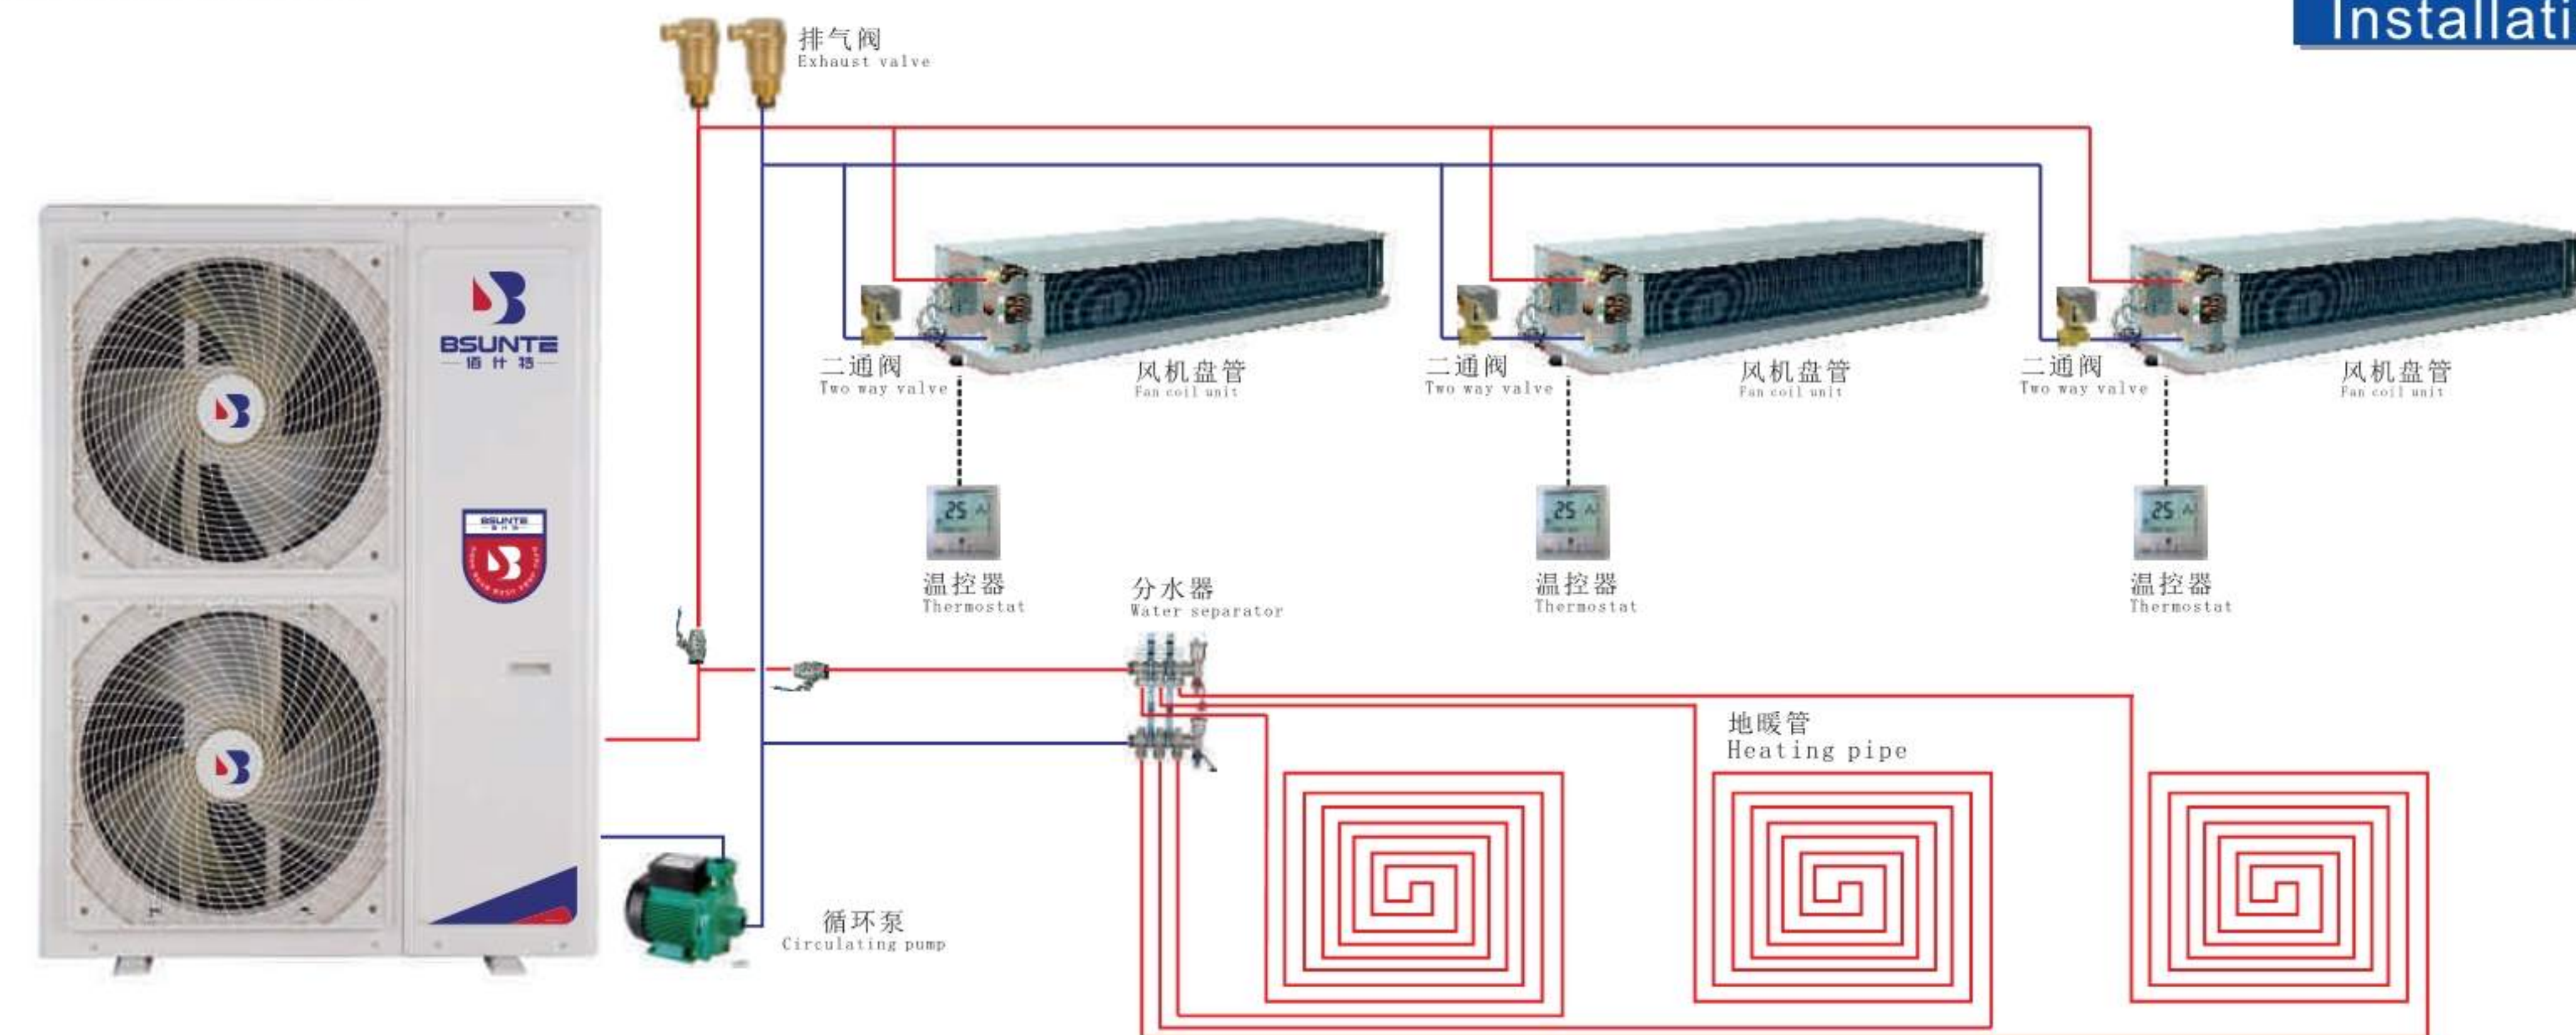


安装示意
Installation sketch

外形尺寸 Outside measurement

项目 Items	型号 Model	BKH03C-B	BKH05C-B	BKH06C-B	BKH10C-B	BKH12C-B	BKH25D-B	BKH50D-B
长 A Length		880	930	1020	1240	1240	1910	2220
宽 B Wide		360	390	370	540	540	960	1120
高 C Height		800	1270	1370	1653	1653	2030	2350
定位孔位 Locator hole	D E							

外形结构 External configuration

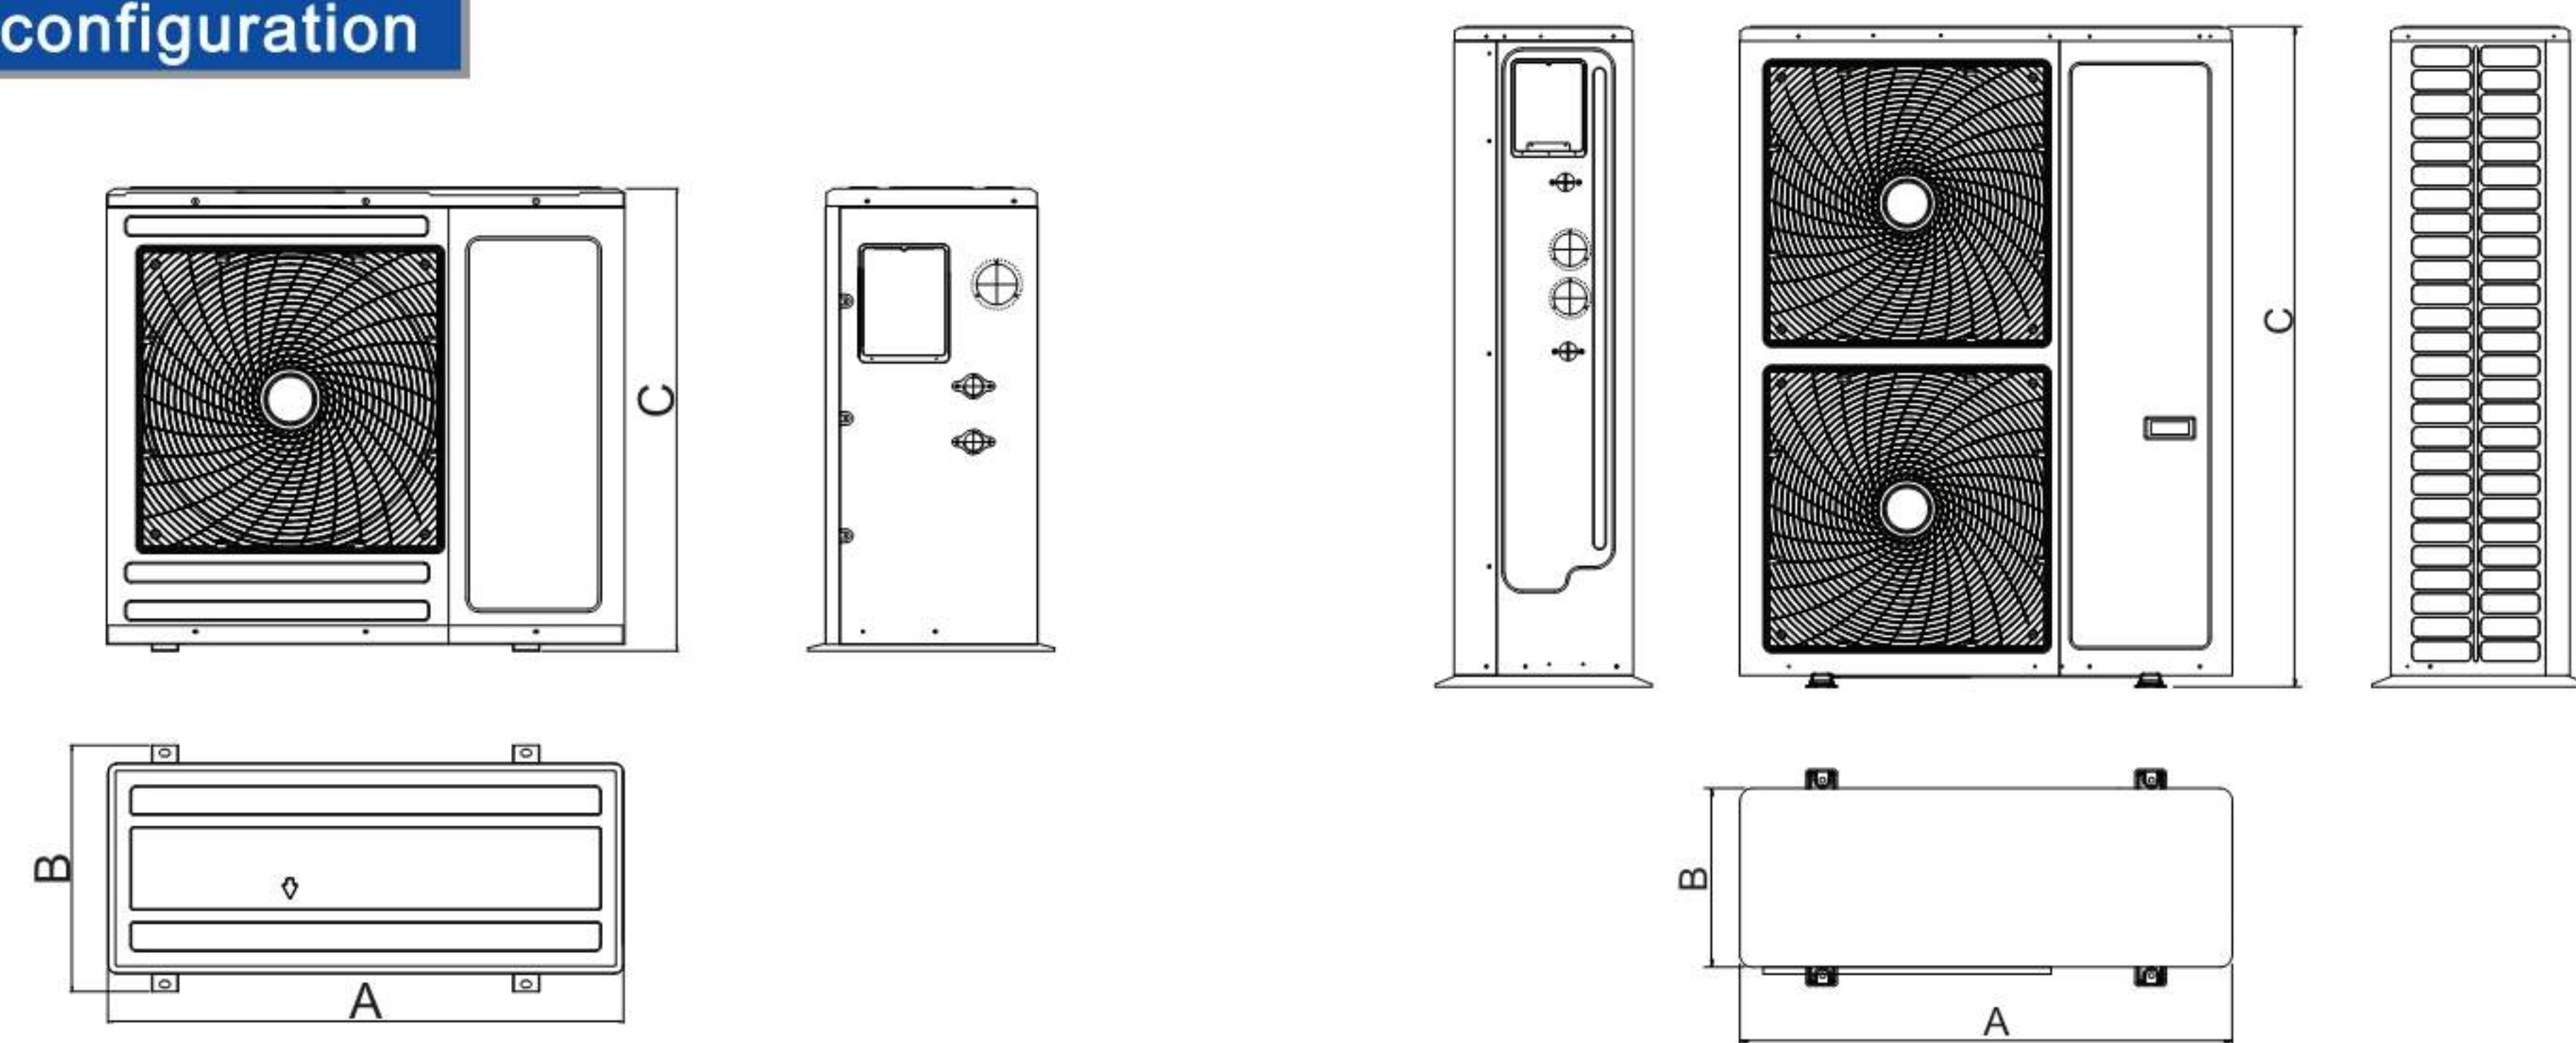

性能特点:

Performance characteristic:

- 值热恒温出水，自动循环保温，水温更稳定，用户更放心。
- 采用微电脑全自动控制，停电记忆功能，使用更放心。
- 完善的故障自检和保护功能，运行更可靠。
- 先进的化霜技术，化霜更安全，效率更高。
- 低静音运行，对环境无任何污染。
- 全部采用世界著名品牌配件，机组寿命更长。

- Direct heat constant temperature water output, automatic circulation on heat preserving, water temperature keeps at certain level, convenient use.
- Apply microcomputer fully automatic control, power off memory function, reliable use.
- Computer self-inspection and protection functions, stable performance
- Advanced de-frosting technology, completely remove frost, higher efficiency.
- Silent work, no pollution to the environment
- Adoption of world-renowned components, Longer shelf life

适用范围

Suitable for

员工宿舍、学生宿舍、宾馆、酒店、桑拿娱乐中心、大型会所、恒温泳池、洗衣店、餐厅、酒楼、养殖场等。
Worker dormitory, student dormitory, guesthouse, hotel entertainment center, big chamber constant temperature pool, laundry shop, restaurant and culture farm.

技术参数 Technical parameter



超低温变频采暖热泵机组 Temperature air-cooled hot and cold water unit

机组型号 Unit model	单位 Unit	BKH03C-B	BKH05C-B	BKH06C-B	BKH05C-B	BKH06C-B	BKH10C-B	BKH12C-B	BKH25D-B	BKH50D-B
额定制冷量	kW	7.5	13	15	13	15	25	26	55	110
-7℃制热量	kW	6.2	10.1	11.2	10.1	11.2	20.5	24.2	48.9	98.3
-7℃制热功率	kW	2.4	3.9	4.3	3.9	4.3	7.9	9.3	18.8	37.8
-12℃制热量	kW	5.8	9.4	11.4	9.4	11.4	18.8	22.6	44.7	89.5
-12℃制热功率	kW	2.5	4.0	4.4	4.0	4.4	8.0	9.6	19.0	38.1
-20℃制热量	kW	4.9	7.6	8.4	7.6	8.4	15.4	18.1	36.7	73.7
-20℃制热功率	kW	2.4	3.9	4.3	3.9	4.3	7.9	9.3	18.8	37.8
最大输入功率	kW	3.5	6.1	6.5	6.1	6.5	12	13	27	55
最大运行电流	A	15.6	26	28	9.8	11	21	23	45	92
电源形式	V/Ph/Hz	220/1/50				380/3/50				
压缩机数量	台	1	1	1	1	1	1	1	1~2	2~4
风机数量	台	1	2	2	2	2	2	2	2	2
风机输入功率	W	75	75*2	85*2	75*2	85*2	200*2	200*2	750*2	1500*2
防水等级		IPX4								
水流量	M/h	1.5	2.5	3	2.5	3	5	6	12	24
水压降	kPa	50								
进/出水管接口		DN25	DN25	DN25	DN25	DN25	DN32	DN40	DN50	DN80
冷媒形式		R410								
运行范围	℃	-30~45								
注氟量	kg	2.7	3.5	3.7	3.5	3.7	5	6.5	6.5*2	6.5*4
噪音	dB(A)	≤55	≤55	≤55	≤55	≤55	≤60	≤60	≤68	≤70
外形尺寸(L/W/H)	mm	880/360/800	930/390/1270	1020/370/1370	930/390/1270	1020/370/1370	1240/540/1653	1240/540/1653	1910/960/2030	2220/1120/2350
包装尺寸(L/W/H)		910/390/900	960/420/1370	1050/400/1470	960/420/1370	1050/400/1470	1270/570/1753	1270/570/1753	1940/990/2130	2250/1150/2450
净重	kg	85	120	125	120	125	245	250	780	1450
毛重	kg	90	125	135	125	135	260	265	800	1470

■ 额定制热测试工况：室外干/湿球温度20℃/15℃，自来水进水温度为水温为55℃。

Work environment for testing rated heating: temperature for dry/ wet balls placed outdoor :20℃/15℃. Incoming tap water temperature 15℃/ exit water temperature is 55℃.

■ 机组使用范围：环境温度-7℃~43℃；

Range in which units operate: ambient temperature -7℃~43℃.

■ 机型、参数。性能会因产品的改良有所改变，恕不另行通知。具体参数请以产品铭牌为准

Due to the machinery innovation or technical modifications, the model and parameter, the performance of the modified products will be subject to changes without prior notice. Please refer to the specific products or models for details.