



Surface Mount General Purpose Silicon Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 1 A

FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Lead free in comply with EU RoHS 2011/65/EU directives
- Hierarchy application and automotive grade AEC-Q101 qualified

MECHANICAL DATA

- Case: SMA-C
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.055g / 0.002oz


Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

PINNING






| PIN | DESCRIPTION |
|-----|-------------|
| 1 | Cathode |
| 2 | Anode |

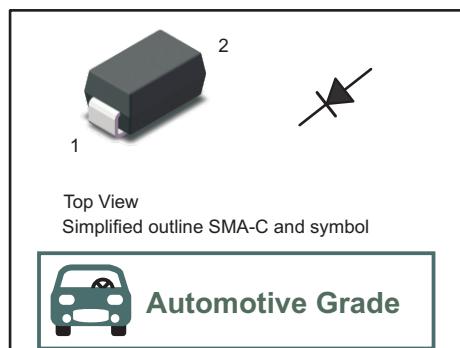

| Parameter | Symbols | AT-S1A | AT-S1B | AT-S1D | AT-S1G | AT-S1J | AT-S1K | AT-S1M | Units |
|---|------------------------------------|------------|--------|--------|--------|--------|--------|---------------|-------|
| Maximum Repetitive Peak Reverse Voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum Average Forward Rectified Current | $I_{F(AV)}$ | 1 | | | | | | A | |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load | I_{FSM} | 30 | | | | | | A | |
| Maximum Instantaneous Forward Voltage at 1 A | V_F | 1.1 | | | | | | V | |
| Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Blocking Voltage $T_a = 125^\circ\text{C}$ | I_R | 5 50 | | | | | | μA | |
| Typical Junction Capacitance ⁽¹⁾ | C_j | 8 | | | | | | pF | |
| Typical Thermal Resistance ⁽²⁾ | $R_{\theta JA}$ $R_{\theta JC}$ | 90 20 | | | | | | °C/W | |
| Operating and Storage Temperature Range | T_j, T_{stg} | -55 ~ +150 | | | | | | °C | |

(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

(2) P.C.B. mounted with 0.2" X 0.2" (5 X 5 mm) copper pad areas.

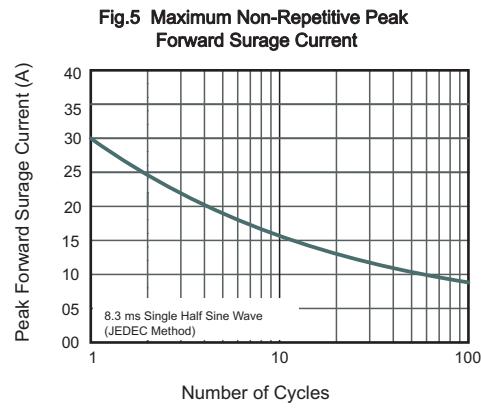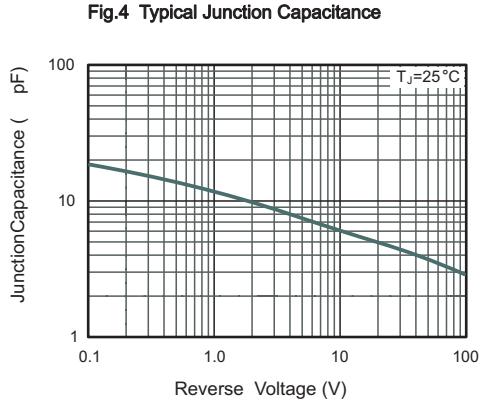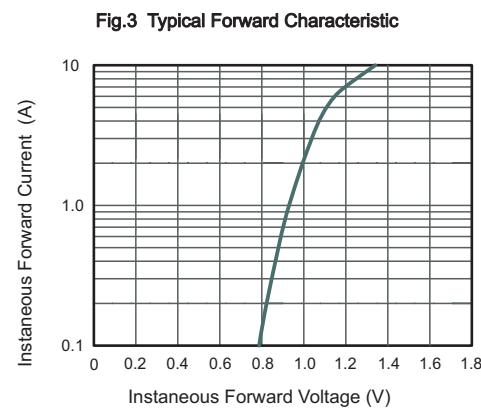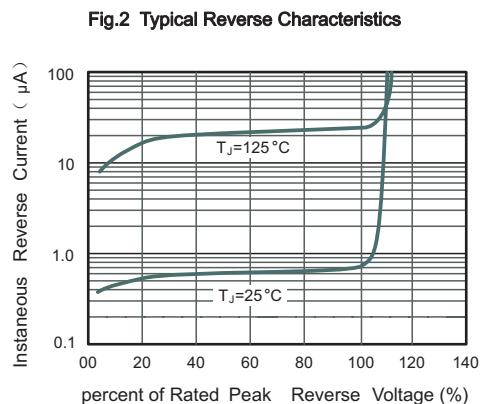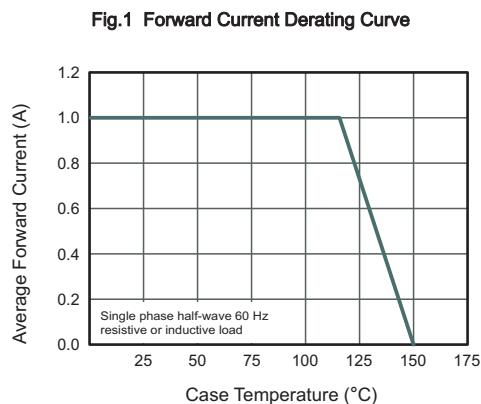





PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SMA-C

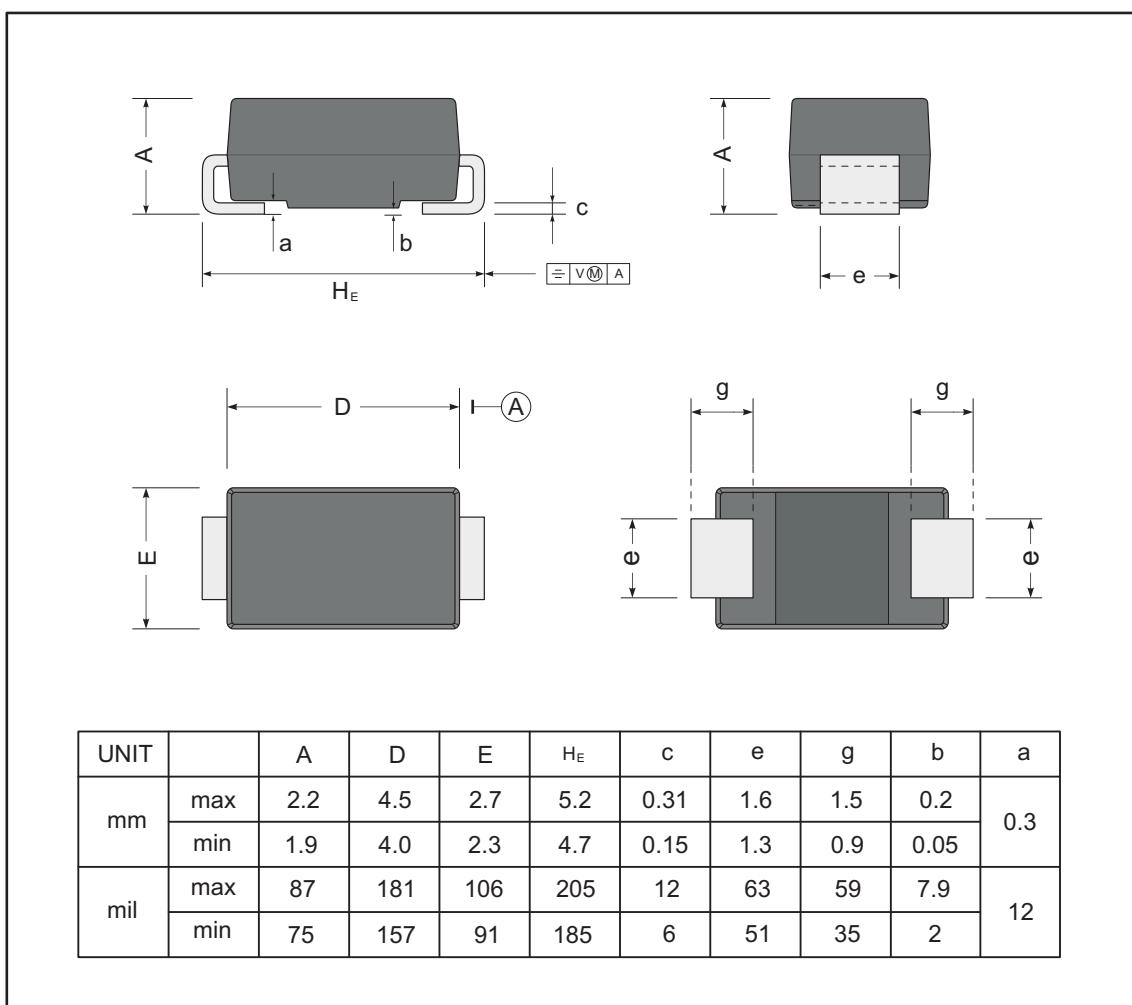

The recommended mounting pad size

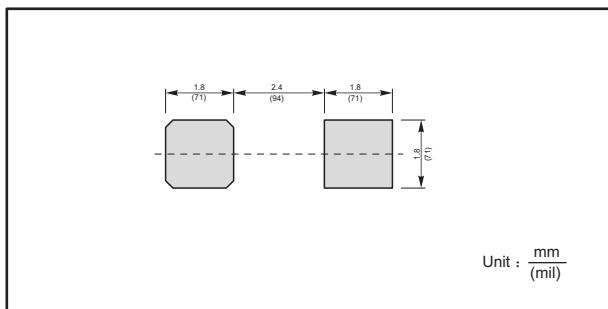

Marking

| Type number | Marking code |
|-------------|--------------|
| AT-S1A | S1A |
| AT-S1B | S1B |
| AT-S1D | S1D |
| AT-S1G | S1G |
| AT-S1J | S1J |
| AT-S1K | S1K |
| AT-S1M | S1M |



文件履历表



Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.