



*** Do not display the fixed pattern for a long time when using a normally black panel, as it may cause image sticking due to the LCM structure. If the screen is displayed in fixed mode, use a screen saver. It is recommended to display the fixed mode in less than 2 minutes or less.

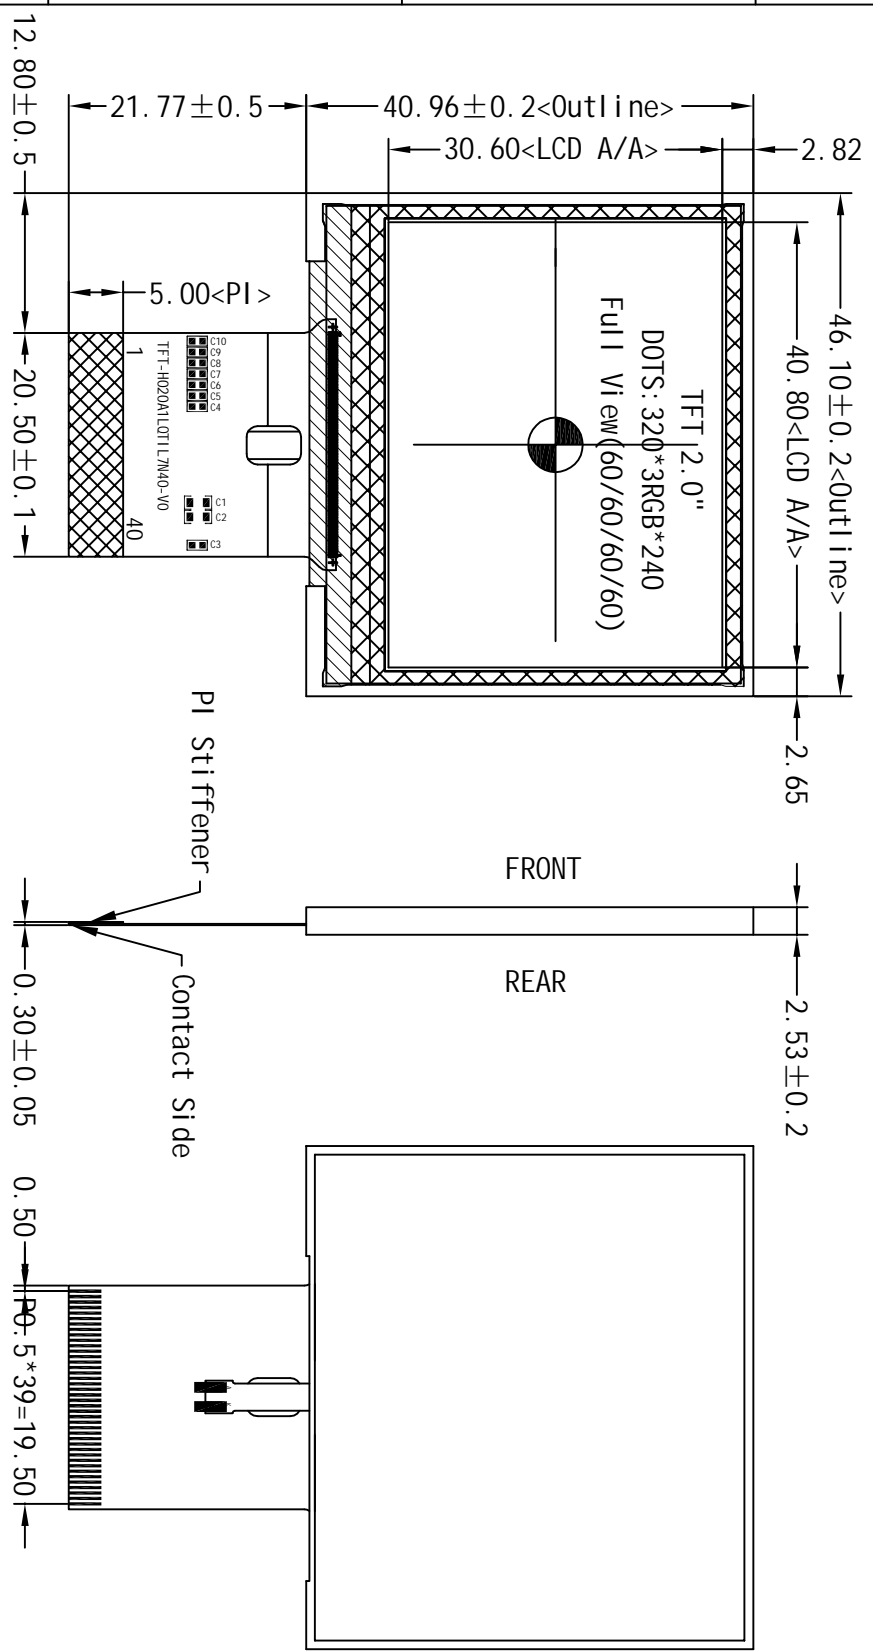

PIN NO.	SIGNAL	PIN NO.	SIGNAL
1	NC	21	NC
2	NC	22	LEDA
3	NC	23	GND
4	NC	24	VCI
5	NC	25	VSD
6	NC	26	HSD
7	NC	27	PCLK
8	NC	28	GND
9	NC	29	GND
10	NC	30	DB0
11	NC	31	DB1
12	GND	32	DB2
13	NC	33	DB3
14	NC	34	DB4
15	NC	35	DB5
16	NC	36	SDA
17	NC	37	SCL
18	NC	38	CS
19	LEDK	39	NC
20	NC	40	RESX

*1. LCD Display Type	TFT, Transmissive, Normally White	*6. Storage Temp	-30° C-80° C
*2. Viewing Direction	Full View (U60/D60/R60/L60)	*7. Driver IC	ILI9342C
*3. Interface	SPi-3L+RGB 6-bit	*8. Backlight	WHITE VF=3.2V IF=60mA(Typ)
*4. Operating Voltage	VCI=3.3V (Typ)	*9. LCM Brightness	700 cd/m ² (Typ)
*5. Operating Temp	-20° C-70° C		



Ding Title: **TFT-H020A1L0T1L7M40-V0**
 Scale: 1:1 Unit: mm Tol: ±0.3
 Ver: A/0 Drawn: Liu Date: 2019-06-25