


Backlight Circuit
Scale=free

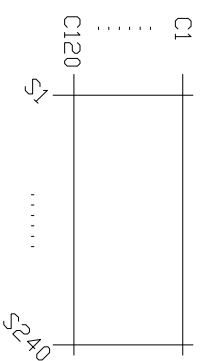

Wiring Details
(Top View)
Scale=free

| No. | Pin Name | Terminal |
|-----|----------|----------|
| 1 | VSS | |
| 2 | VDD | |
| 3 | D7 | |
| 4 | D6 | |
| 5 | D5 | |
| 6 | D4 | |
| 7 | D3 | |
| 8 | D2 | |
| 9 | D1 | |
| 10 | D0 | |
| 11 | /RD | |
| 12 | /WR | |
| 13 | D/C | |
| 14 | /RST | |
| 15 | CS | |
| 16 | BLA | |

- Note:
- *1. LCD Display Type : FSTN, Positive, Transflective
 - *2. Viewing Direction : 12H
 - *3. Duty : 1/120, Bias : 1/10
 - *4. Operating Voltage : 3.3V, Vlcd = 16.5V
 - *5. Operating Temperature : -25°C~80°C
 - *6. Storage Temperature : -30°C~80°C
 - *7. Control/Drive IC : UC1608
 - *8. Backlight Colour : White(led)

HOT DISPLAY

HTG240120 Outline Dwg

| | | | |
|-----------------------|--|------------|--|
| Dwg Title | | Date | |
| HTG240120 Outline Dwg | | 2011-04-11 | |
| Dwg No. | | Unit | |
| 1104111405 | | mm | |
| Scale | | Tol. | |
| ±0.2 | | Checked | |
| Drawn | | Approved | |