





Terminal No.	Pin Name
1	/CS1
2	/RES
3	A0
4	VR(R/W)
5	/R/D(E)
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6
13	DB7
14	VSS
15	V/OUT
16	C3+
17	C1-
18	C1+
19	C2+
20	C2-
21	V4
22	V3
23	V2
24	V1
25	V0
26	OB6
27	P/S
28	VDD

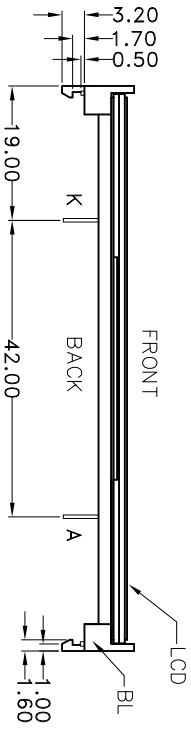

*1. LCD Display Type	FSTN,Transflective,Positive		
*2. Viewing Direction	6H	*6. Storage Temp	-30°C~80°C
*3. LCD Driver Mode	1/64Duty,1/9Bias	*7. Driver IC	ST7565P
*4. Operating Voltage	3.3V	*8. Backlight	WHITE Vf=3.3V If=60mA
*5. Operating Temp	-20°C~70°C	*9. RHHS	

HOT DISPLAY

Dwg Title: HTG12864-96-31W-28K10-V03

EDC No: Ver: A/0

Scale 1:1 Unit mm Tol. ±0.3

Drawn Checked Dater: 2018-07-23